

Description

The HSBA4018 is the high cell density trenched N-ch MOSFETs, which provide excellent RDSON and gate charge for most of the synchronous buck converter applications.


The HSBA4018 meet the RoHS and Green Product requirement 100% EAS guaranteed with full function reliability approved.

- 100% EAS Guaranteed
- Green Device Available
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- Advanced high cell density Trench technology

Product Summary

V _{DS}	40	V
R _{DSON,typ}	2.3	mΩ
I _D	120	A

PRPAK5*6 Pin Configuration

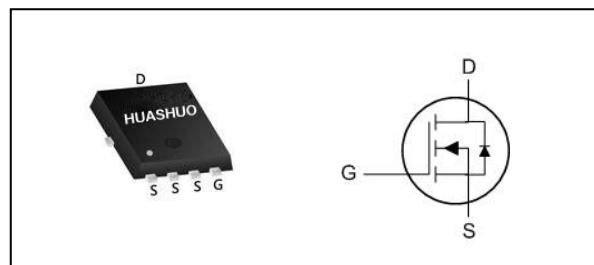

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	40	V
V _{GS}	Gate-Source Voltage	± 20	V
I _D @T _C =25°C	Continuous Drain Current, V _{GS} @ 10V ¹	120	A
I _D @T _C =100°C	Continuous Drain Current, V _{GS} @ 10V ¹	75	A
I _{DM}	Pulsed Drain Current ²	480	A
EAS	Single Pulse Avalanche Energy ³	440	mJ
P _D @T _C =25°C	Total Power Dissipation ⁴	75	W
T _{STG}	Storage Temperature Range	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
R _{θJA}	Thermal Resistance Junction-Ambient ¹	---	55	°C/W
R _{θJC}	Thermal Resistance Junction-Case ¹	---	1.7	°C/W

Electrical Characteristics (T_J=25 °C, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =250uA	40	---	---	V
△BV _{DSS} /△T _J	BVDSS Temperature Coefficient	Reference to 25°C , I _D =1mA	---	0.034	---	V/°C
R _{DS(ON)}	Static Drain-Source On-Resistance ²	V _{GS} =10V , I _D =20A	---	2.3	3.0	mΩ
		V _{GS} =4.5V , I _D =20A	---	3.0	3.8	
V _{GS(th)}	Gate Threshold Voltage	V _{GS} =V _{DS} , I _D =250uA	1.0	1.5	2.5	V
△V _{GS(th)}	V _{GS(th)} Temperature Coefficient		---	-5.84	---	mV/°C
I _{DSS}	Drain-Source Leakage Current	V _{DS} =40V , V _{GS} =0V , T _J =25°C	---	---	1	uA
		V _{DS} =40V , V _{GS} =0V , T _J =125°C	---	---	100	
I _{GSS}	Gate-Source Leakage Current	V _{GS} = ± 20V , V _{DS} =0V	---	---	± 100	nA
g _{fs}	Forward Transconductance	V _{DS} =5V , I _D =15A	---	39	---	S
R _g	Gate Resistance	V _{DS} =0V , V _{GS} =0V , f=1MHz	---	1.0	---	Ω
Q _g	Total Gate Charge	V _{DS} =20V , V _{GS} =10V , I _D =20A	---	110	---	nC
Q _{gs}	Gate-Source Charge		---	19	---	
Q _{gd}	Gate-Drain Charge		---	18	---	
T _{d(on)}	Turn-On Delay Time	V _{DD} =15V , V _{GS} =10V , R _G =3.3Ω I _D =1A	---	12	---	ns
T _r	Rise Time		---	24	---	
T _{d(off)}	Turn-Off Delay Time		---	79	---	
T _f	Fall Time		---	21	---	
C _{iss}	Input Capacitance	V _{DS} =20V , V _{GS} =0V , f=1MHz	---	6150	---	pF
C _{oss}	Output Capacitance		---	410	---	
C _{rss}	Reverse Transfer Capacitance		---	344	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I _s	Continuous Source Current ^{1,5}	V _G =V _D =0V , Force Current	---	---	120	A
I _{SM}	Pulsed Source Current ^{2,5}		---	---	480	A
V _{SD}	Diode Forward Voltage ²	V _{GS} =0V , I _s =1A , T _J =25°C	---	---	1	V
t _{rr}	Reverse Recovery Time	I=20A , dI/dt=100A/μs , T _J =25°C	---	26	---	nS
Q _{rr}	Reverse Recovery Charge		---	17	---	nC

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width ≤ 300us , duty cycle ≤ 2%
- 3.The EAS data shows Max. rating . The test condition is V_{DD}=40V,V_{GS}=10V,L=0.5mH
- 4.The power dissipation is limited by 150°C junction temperature
- 5.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.



Typical Characteristics

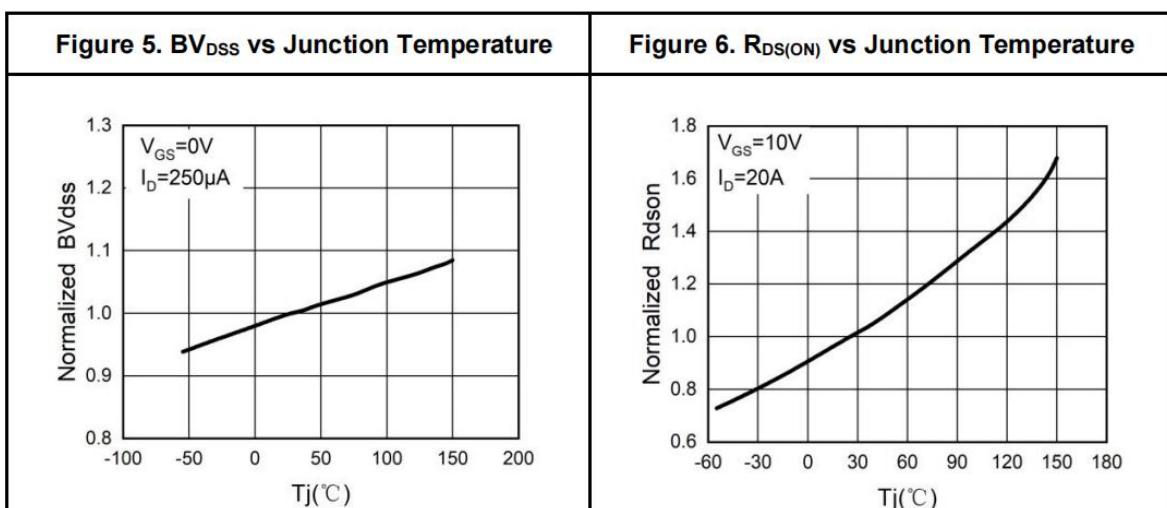
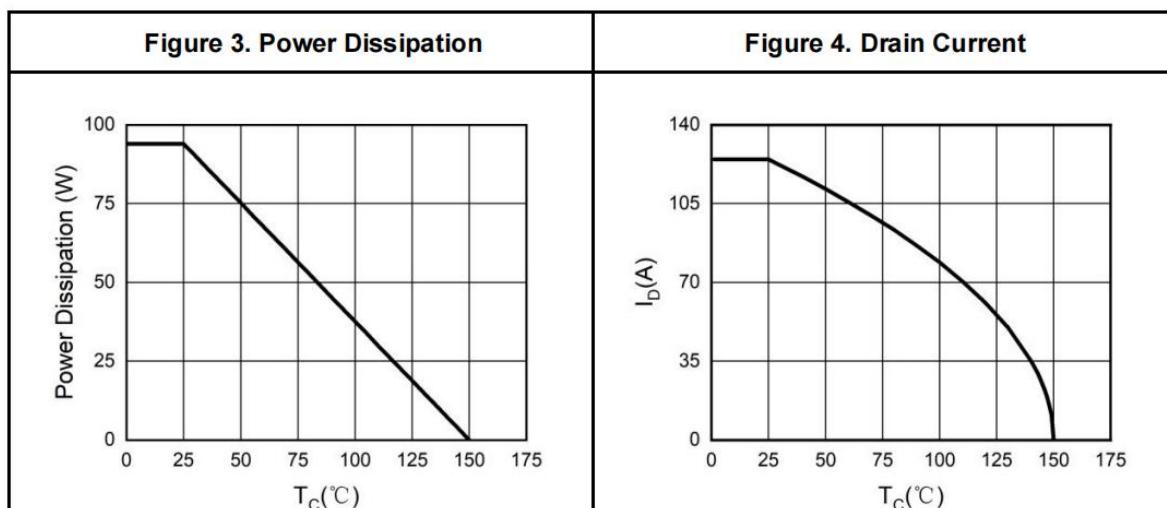
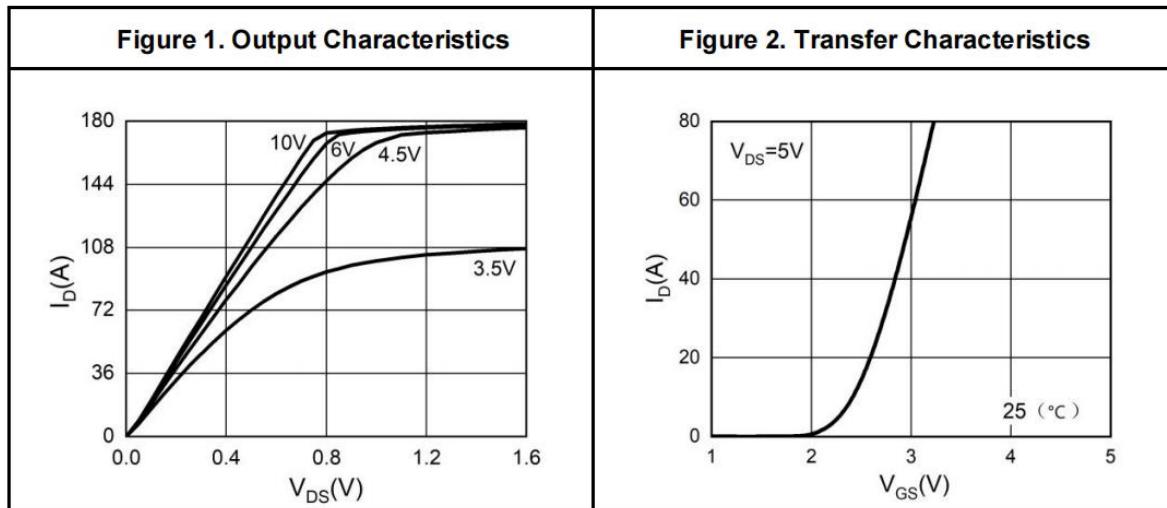




Figure 7. Gate Charge Waveforms

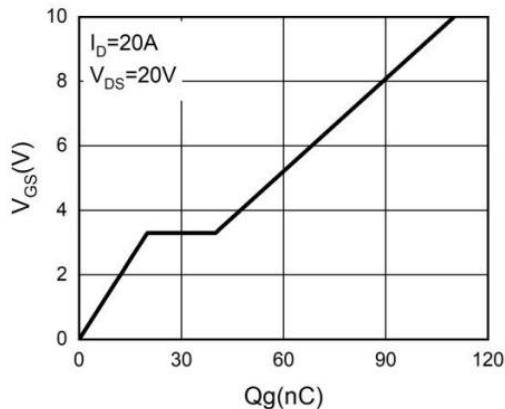


Figure 8. Capacitance

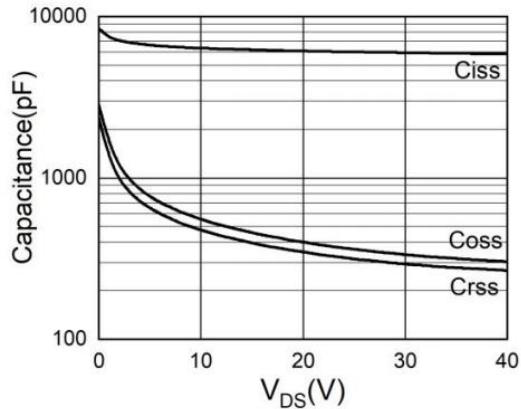


Figure 9. Body-Diode Characteristics



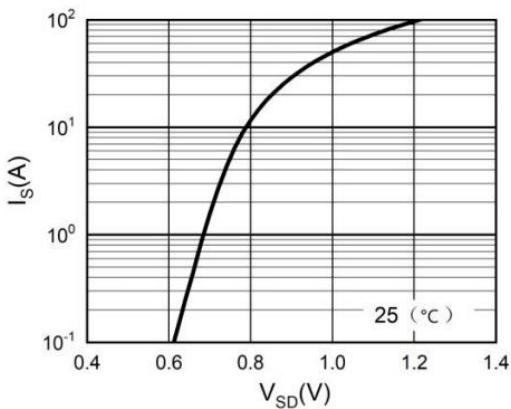


Figure 10. Maximum Safe Operating Area



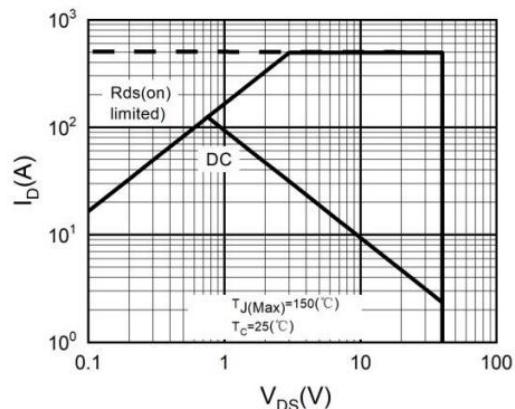

PRPAK5X6 Package Outline Dimensions

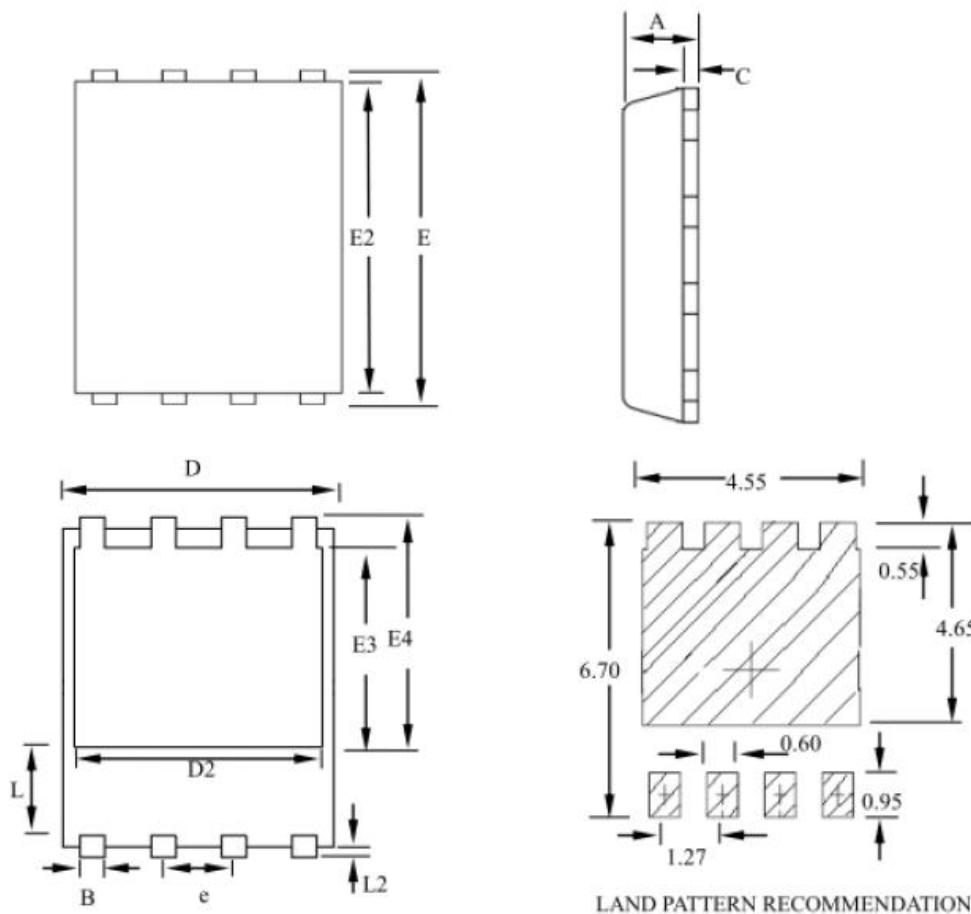

SYMBOLS	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	--	1.20	0.031	--	0.047
B	0.30	--	0.51	0.012	--	0.020
C	0.15	--	0.35	0.006	--	0.014
D	4.80	--	5.30	0.189	--	0.209
D2	3.61	--	4.35	0.142	--	0.171
E	5.90	--	6.35	0.232	--	0.250
E2	5.42	--	5.90	0.213	--	0.232
E3	3.23	--	3.90	0.127	--	0.154
E4	3.69	--	4.55	0.145	--	0.179
L	0.61	--	1.80	0.024	--	0.071
L2	0.05	--	0.36	0.002	--	0.014
e	--	1.27	--	--	0.050	--